




INSTALLATION INSTRUCTIONS for EDEN bath skirt



IMPORTANT
Make a trial fit of the skirt
before finalizing installation.



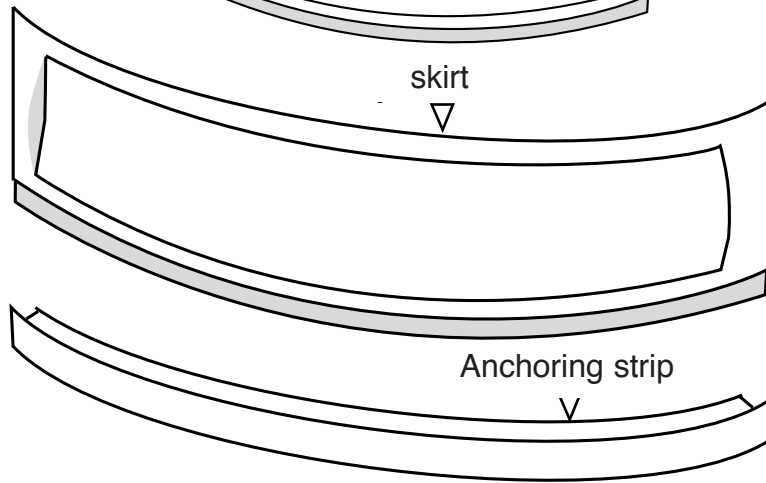


PHOTO A

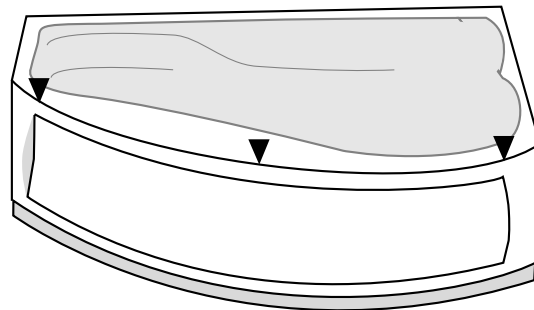

1

Once the leveled installation of the tub is completed, fix adjustable legs to floor (photo A). Glue the wood blocks beneath the rim of the tub and let it dry until blocks are solidly in place. With a level trace a line on the floor following the tub rim. (figure

2

Secure the anchoring strip to the floor 2" inside the line. (see figure 2)

3

Insert the top of the skirt under the flange of the tub and then screw the skirt to the anchoring strip. Use the 6 predrilled holes as guides.

figure 2





figure 1


wood block

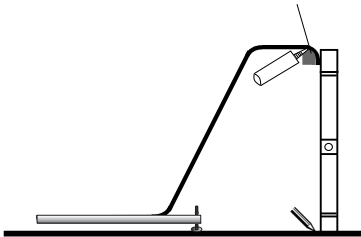

note:

our skirt has been designed to fit in a variety of installation applications. In some cases it may be necessary to slightly trim the ends of the skirt. you must use a circular fine tooth saw from behind (the fiberglass unfinished side).

Bloc de bois
wood block

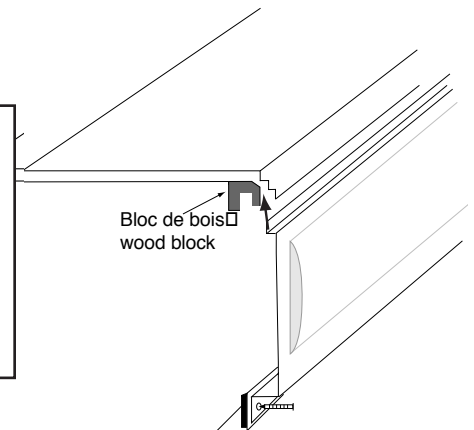


November 2006

Tel: (732) 441-3990 Fax: (732) 441-3991





INSTALLATION INSTRUCTIONS

for a neo-angle bath skirt




IMPORTANT

Make a trial fit of the skirt before finalizing installation.

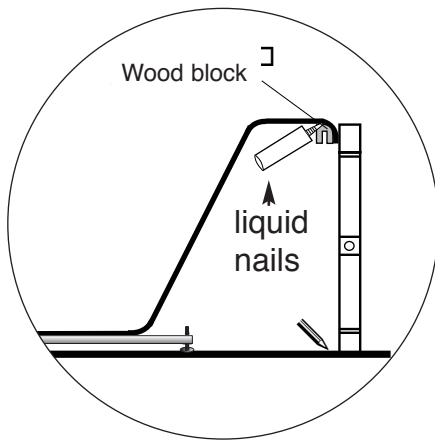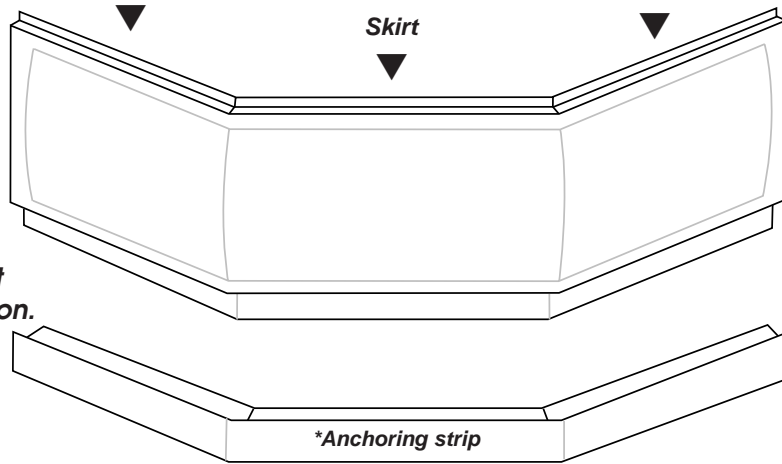


1

Once the leveled installation of the tub is completed, fix adjustable legs to floor (photo A). Glue the wood blocks beneath the rim of the tub and let dry until blocks are solidly in place. With a level trace a line on the floor following the tub rim. (see figure 1)

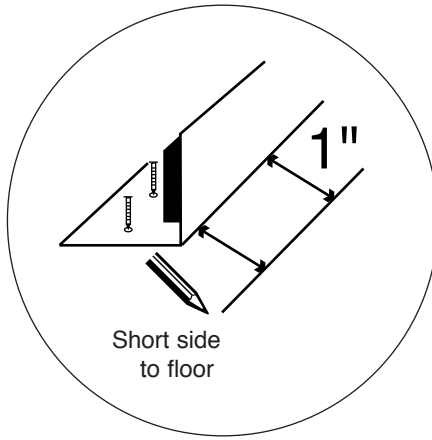

2

Secure the anchoring strip to the floor 1" inside the line. (see figure 2)

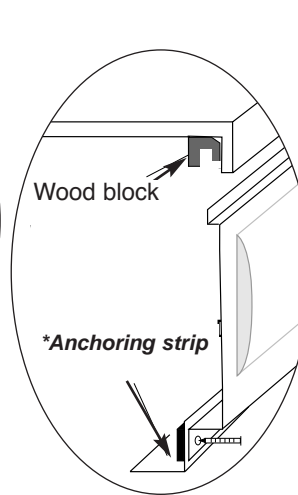

3

Insert the top of the skirt under the flange of the tub and then screw the skirt to the anchoring strip. Use the 6 predrilled holes as guides. (see figure 3)


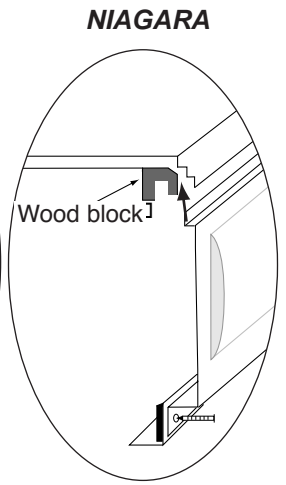


PHOTO A



note:

our skirt has been designed to fit in a variety of installation applications. In some cases it may be necessary to slightly trim the ends of the skirt. you must use a circular fine tooth saw from behind (the fiberglass unfinished side).



November 2006

Tel: (732) 441-3990 Fax: (732) 441-3991




INSTALLATION INSTRUCTIONS

for a round front corner bath skirt

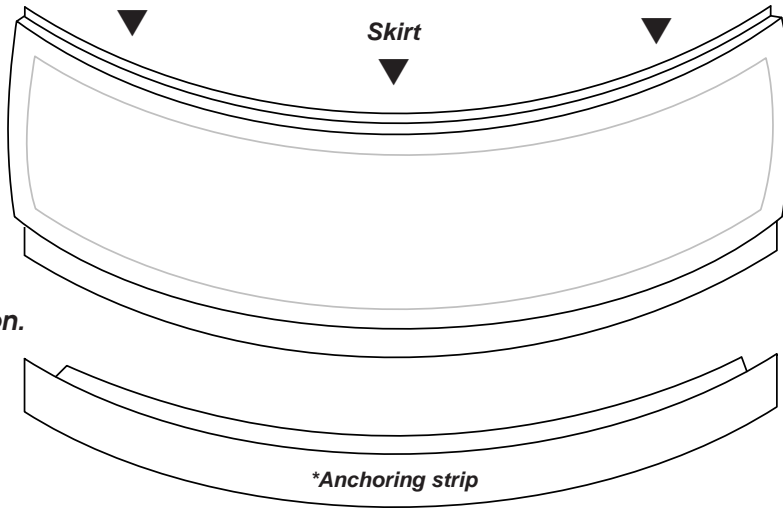


IMPORTANT
 Make a trial fit of the skirt
 before finalizing installation.

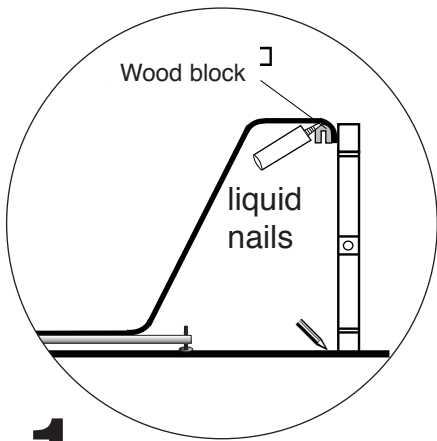

1

Once the leveled installation of the tub is completed, fix adjustable legs to floor (photo A). Glue the wood blocks beneath the rim of the tub and let dry until blocks are solidly in place. With a level trace a line on the floor following the tub rim. (see figure 1)


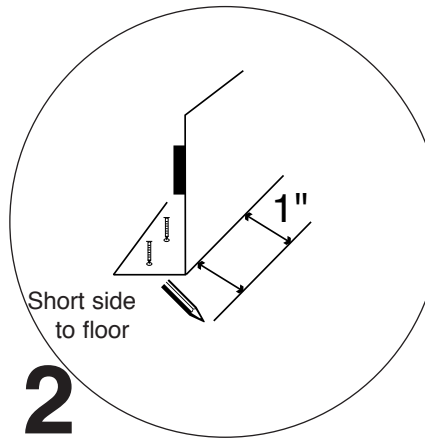


2

Secure the anchoring strip to the floor 1" inside the line. (see figure 2)

RENDEZ-VOUS

MONTEGO

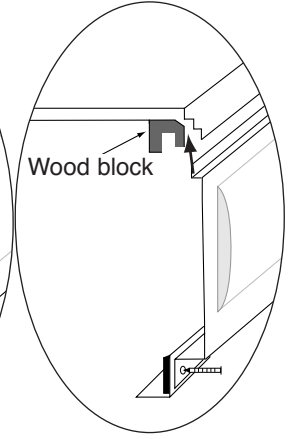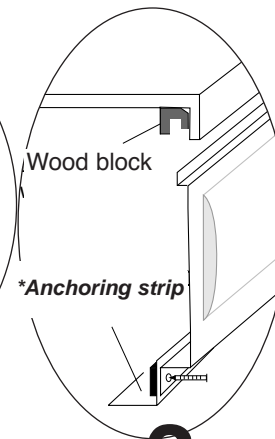

3

Insert the top of the skirt under the flange of the tub and then screw the skirt to the anchoring strip. Use the 6 predrilled holes as guides. (see figure 3)

PHOTO A



note:
 our skirt has been designed to fit in a va-riety of installation applications. In some cases it may be necessary to slightly trim the ends of the skirt. you must use a circular fine tooth saw from behind (the fiberglass unfinished side).


November 2006

Tel: (732) 441-3990 Fax: (732) 441-3991





INSTALLATION INSTRUCTIONS

for a *PASSION* skirt




IMPORTANT

Make a trial fit of the skirt before finalizing installation.

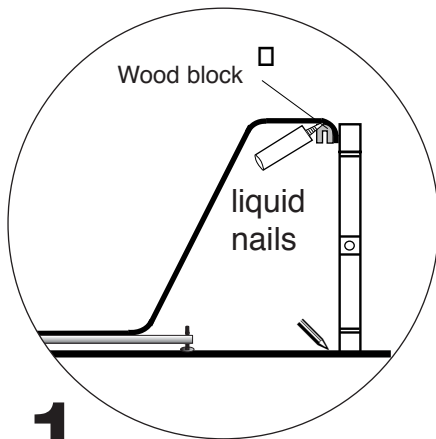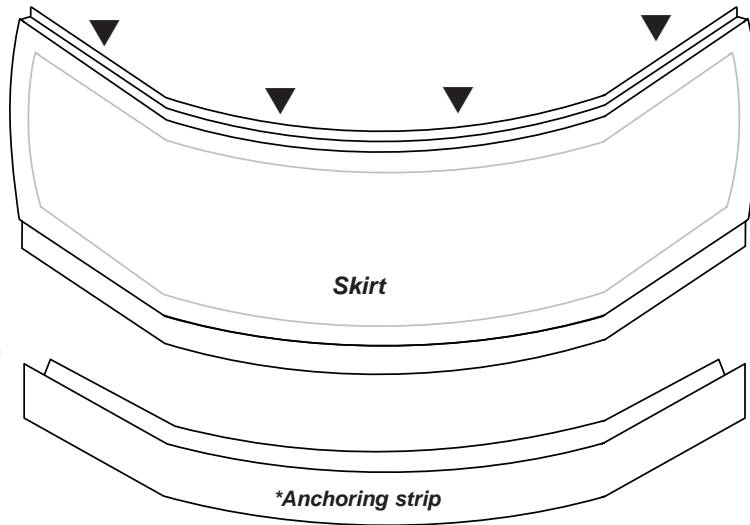


1

Once the leveled installation of the tub is completed, fix adjustable legs to floor (photo A). Glue the wood blocks beneath the rim of the tub and let dry until blocks are solidly in place. With a level trace a line on the floor following the tub rim. (see figure 1)

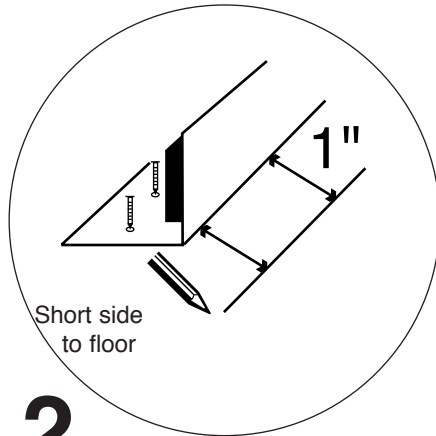

2

Secure the anchoring strip to the floor 1" inside the line. (see figure 2)

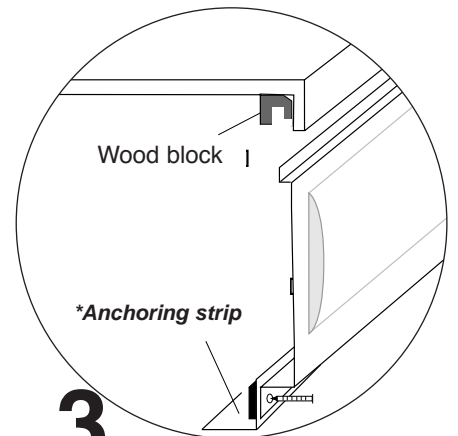

3

Insert the top of the skirt under the flange of the tub and then screw the skirt to the anchoring strip. Use the 6 predrilled holes as guides. (see figure 3)

PHOTO A



November 2006

Tel: (732) 441-3990 Fax: (732) 441-3991